

FIGURE 1

IE ID	Length	TI	OUI	Type
-------	--------	----	-----	------


Fig. 2A

Field	Value
IE ID	0xDD
Length	4
TI OUI	0x080028
Туре	0x00

Fig. 2B

Protocol Version				Supported Feature Set Designator			
7	6.	5	4	3	2	1	0
0	0	0	0	0	0	0	0

Fig.2C



24 Octets 8 Octets 4 Octets n Octets n Octets

802.11
Header TI SNAD Concestenation 4 N Header Concestenated MSDU Concestenated MSDU

n Octets	
Concatenated MSDU	

Fig. 4A

1 Octet	1 Octet	1 Octet	3 Octets	2 Octets
DSAP	SSAP	Control	OUI	Type
0xAA	0xAA	0x00	TI = 0x080028	WLAN=0x60D0

Fig. 4B




Fig. 4C

2 Octets	6 Octets	8 Octets	n Octets	0-3 Octets
MSDU Length	DA	SNAP	MSDU Payload	Padding

Fig. 5A

2 Octets	6 Octets	8 Octets	n Octets	0-3 Octets	,
MSDU Length	SA	SNAP	MSDU Payload	Padding	

Fig. 5B

2 Octets	6 Octets	6 Octets	8 Octets	n Octets	0-3 Octets
MSDU Length	SA	DA	SNAP	MSDU Payload	Padding

Fig. 5C

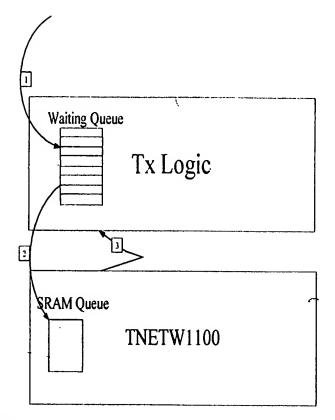


Fig. 6

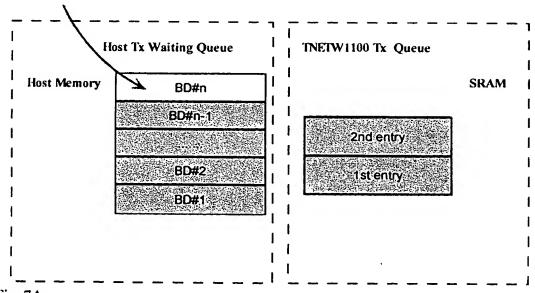


Fig. 7A

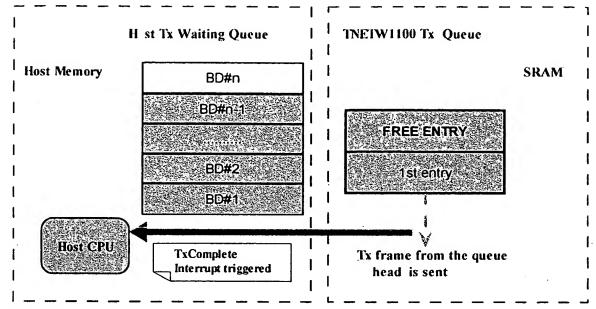


Fig. 7B

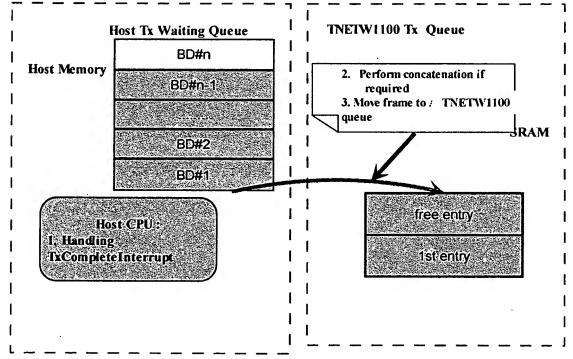


Fig. 7C

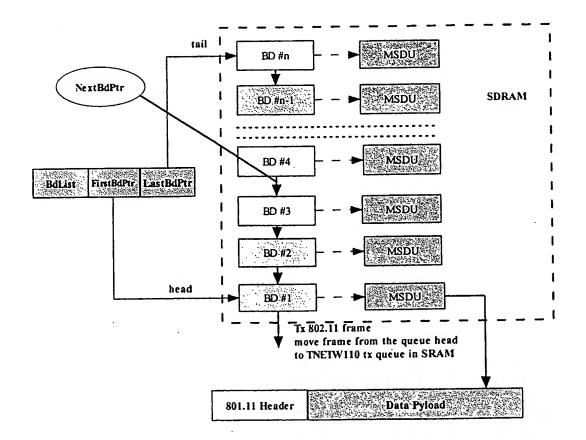


FIGURE 8

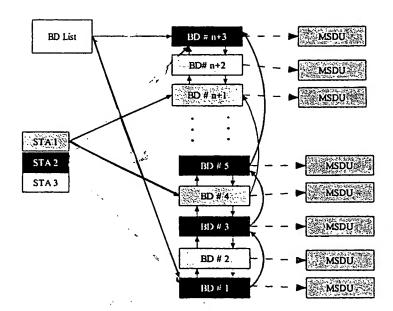
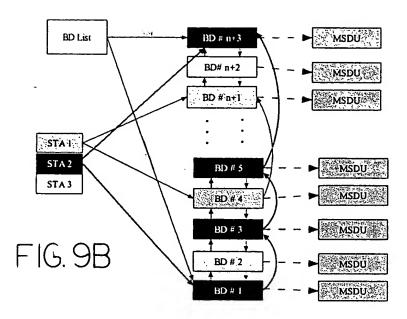
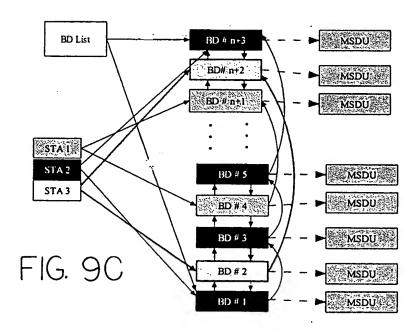


FIGURE 9A





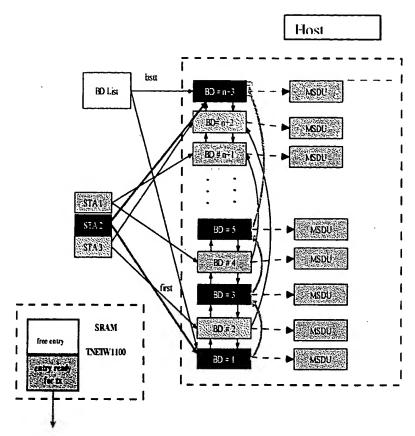


Fig. 10A

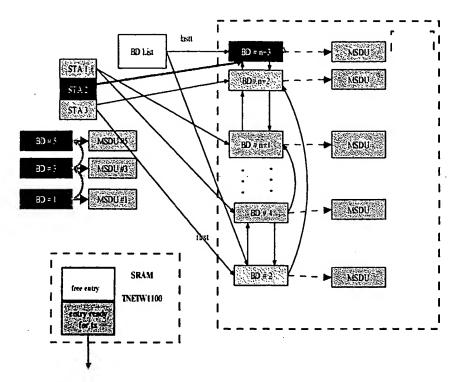


Fig. 10B

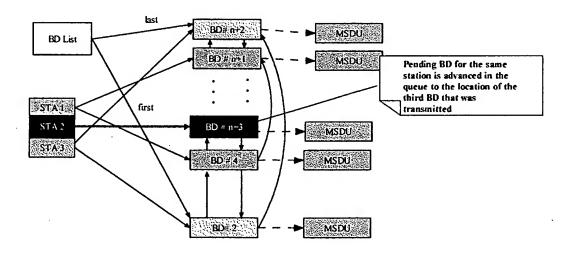


Fig. 10C

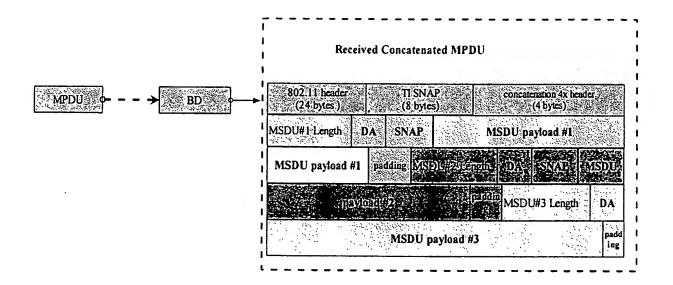


FIG. II

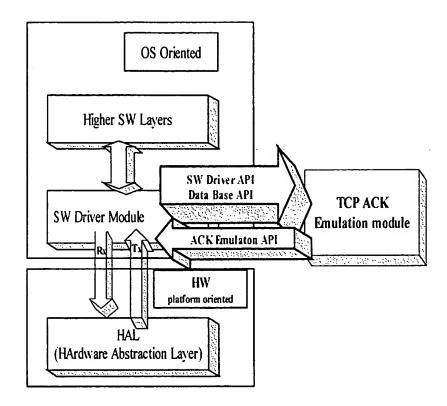
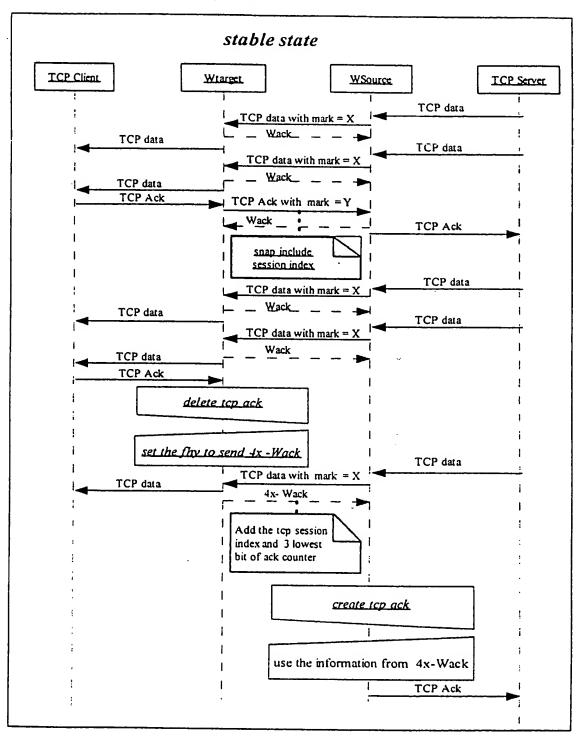


Fig. 12

FIG. 13



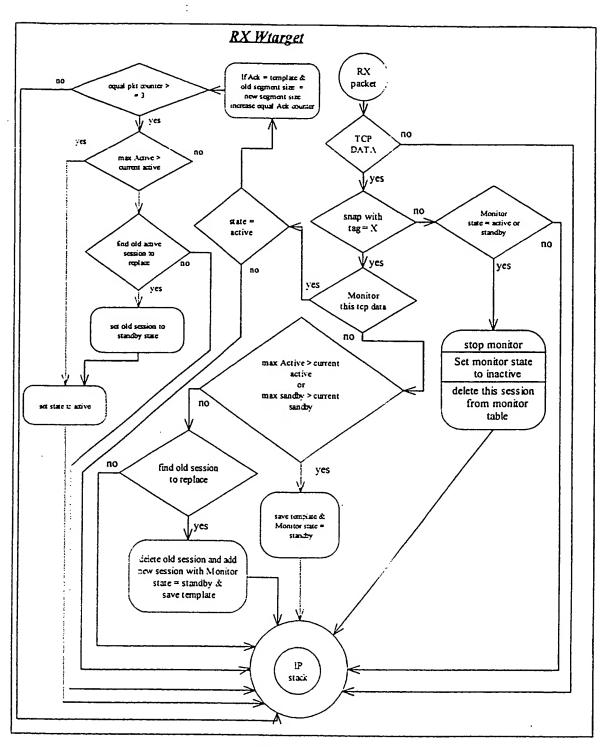


FIG. 14

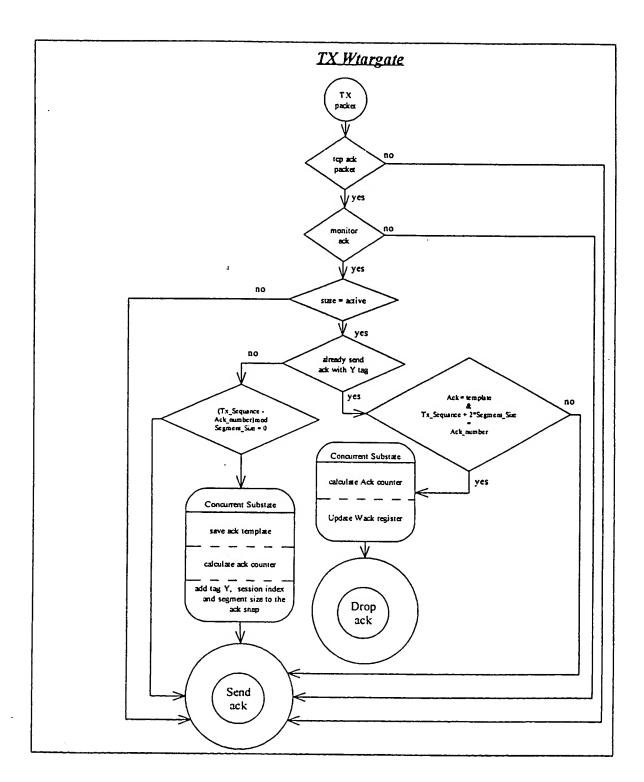


FIG. 15

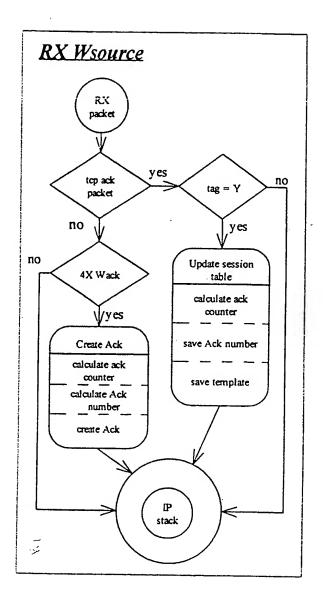


FIG. 16